

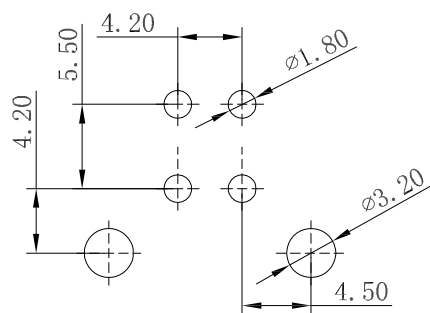
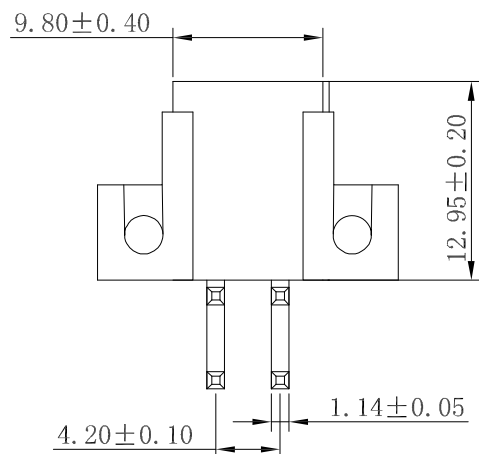


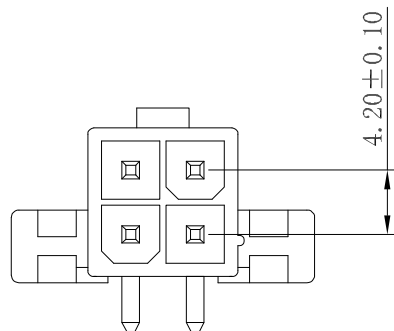

RECOMMENDED P.C.B OARD LAYOUT (T=1.6MM)
PCB TOLERANCE:±0.05

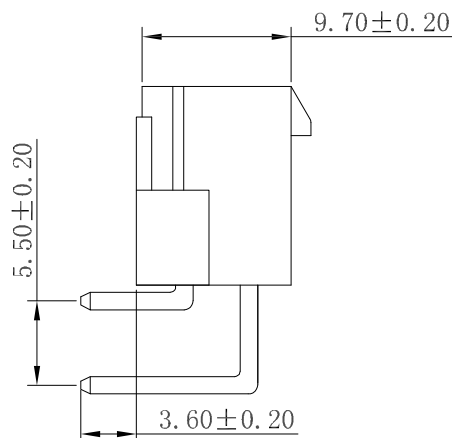

NOTES:

1. Material:

Housing: Nylon 66, UL 94V-0 Rated.
Color: White.
Contact: Brass C2680.
Plating: Tin Plating Over All,
Nickel Under Plating Over All.

2. Electrical Specification:

Voltage Rating: 250V AC/DC.
Current Rating: 7 Ampere AC/DC.
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 1500V AC per Minute.

3. Environmental:

Operating Temperature: -25°C to +85°C

Part Number:

CATX-M04RDT1-5L

ATX Power Series
M: Male Type
04: 4Pins
R: Right Angle
L: With Screw Holes
5: Pin Row=5.5mm
1: White Color
T: Tin Plating
D: DIP Type

A	05/24/11	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		 凱聯科技股份有限公司 Conn-Link Technology Inc.	
DECIMALS	ANGLES		
.X ± .38	± 3°		
.XX ± .25			
.XXX ± .20			
DO NOT SCALE DRAWING		SHEET 1 OF 1 SCALE NONE DWG. NO. CATX-M04-05L REV. A	