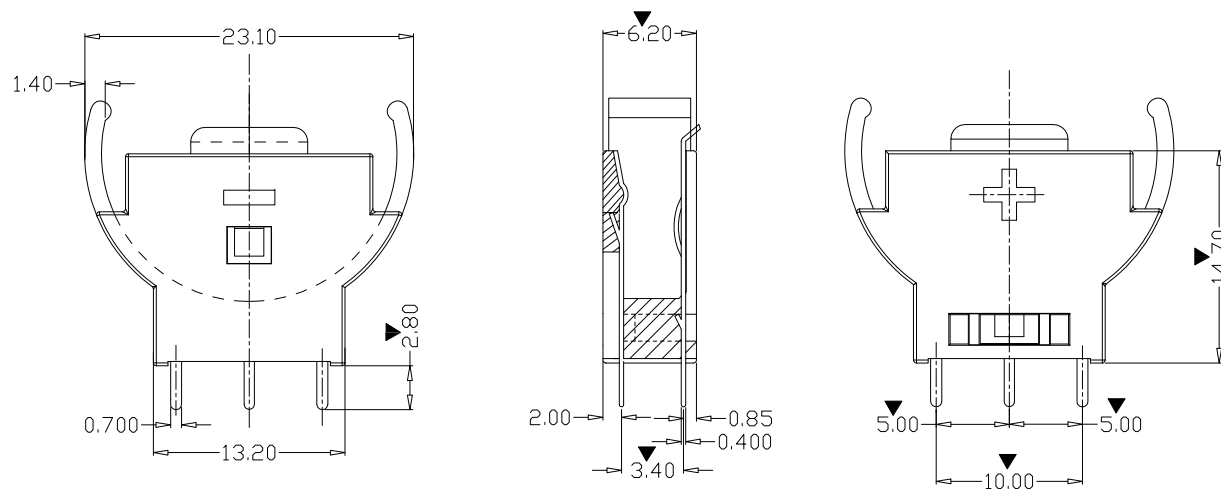


Recommend PCB Layout

NOTES:

1. Material:

Housing: Thermoplastic PA66, UL 94V-0 Rated.
Color: Black.
Contact: Brass.
Plating: Tin Plating(100u") over Nickel.

2. Specification:

Application for 3V Lithium Battery.
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 750VAC per Sec Level.
Durability: 50 Cycles Min.

3. Environmental:

Operating Temperature: -55°C to +85°C
▼ Important Quality Control Dimension.

Part Number:

CBAH-002VDT0-B4

Battery Holder
0: CR2032/BR2032
02: 2Pins
V: Vertical Type

Product Number:
B4: Straight Battery Holder
0: Black Color
T: Tin Plating
D: DIP Type

A	07/03/07	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		 凱聯科技股份有限公司 Conn-Link Technology Inc.	
DECIMALS	ANGLES		
.X ± .38	± 3°		
.XX ± .25			
.XXX ± .20			
DO NOT SCALE DRAWING		DESCRIPTION	
		Battery Holder, CR2032/BR2032, Straight, DIP(No Post)	
		DWG. NO. CBAT-002-0B4	
		REV. A	