

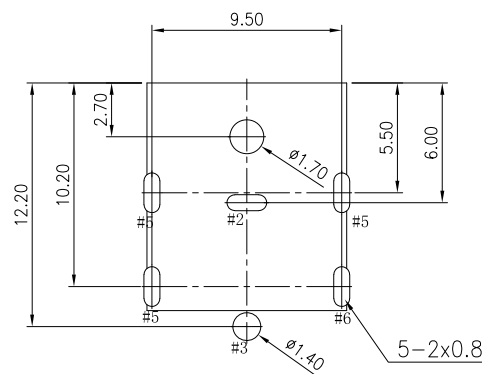
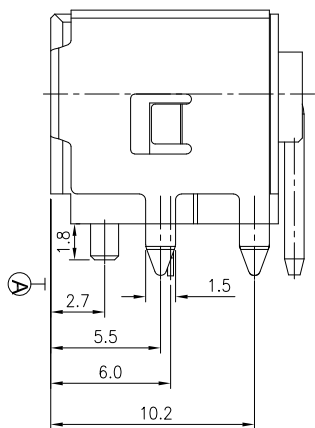


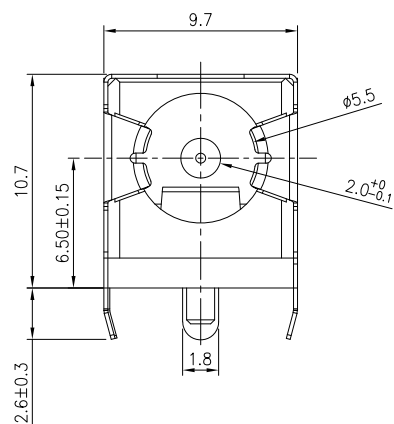

Recommend of PC Board Holes
Tolerance : ±0.05(Top view)

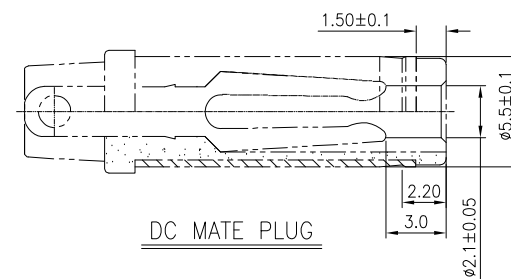

Specification:

1. Rating: DC 24V 10A.
2. Contact Resistance: 0.03Ω Max.
Between Plug and Contact: 0.10Ω Max.
After Life Test: 0.06Ω Max.
3. Insulation Resistance: 100MΩ Min. Measured by 500V DC.
4. Withstand Voltage: 500V AC for One Minute.
5. Insertion and Extraction Force: 0.3Kgf~3.0Kgf.
6. Life Test: 5,000 Cycles Min.
7. Operation Temperature Range: -20°C~+70°C.
8. Soldering Heat Resistance Reflow Soldering: 260°C.
9. Plug Interface Dimensions Conform to EIAJ RC-5321 Spec.



Part Number:

CDCJ-204RDT0-8H

DC Power Jack
XX: Center Pin
20:2.0mm

8H: Product Number
0: Black Color
T: Tin Plating
D: DIP Type
R: Right Angle
4: 4Pins

CDCJ-204RDT0-8H	
ø2.0	
	3
	6
	2
	5
CIRCUIT DIAGRAM	

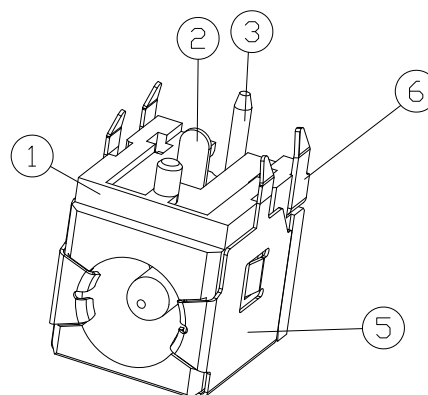

6	CONTACT FOOT	1	BRASS	MB: Ni Sn Plating
5	SHELL	1	SUS301	Ni Plating
4	STOPPER	1	SUS301	N/A
3	CENTER PIN	1	BRASS	Ni Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	MB: Ni Sn Plating
1	HOUSING	1	PA9T, UL94 V-0	Black Color
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

A	05/27/16	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS ANGLES		APPROVALS	DATE
.X ± .38		DRAWN Chris	05/27/16
.XX ± .25		CHECKED Cindy	05/27/16
.XXX ± .20		APPV Jason	05/27/16
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
		DWG. NO.	CDCJ-204-08H
		REV.	A



凱聯科技股份有限公司
Conn-Link Technology Inc.

DESCRIPTION DC Power Jack, 2.0mm/5.5mm, Right Angle, DIP, H=10.7mm, With Shielding, Black Color

DWG. NO. CDCJ-204-08H

REV. A