



Part No.	CDCJ-203RDT0-5H	CDCJ-253RDT0-5H
PIN	∅2.0	∅2.5

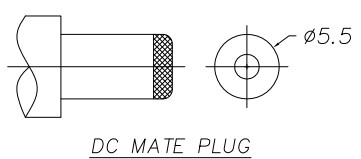

Specification:

1. Rating: DC 24V 5A.
2. Contact Resistance: 0.03Ω Max.
After Life Test: 0.05Ω Max.
3. Insulation Resistance: 100MΩ Min. (500V DC)
After Life Test: 50MΩ Min.
4. Withstand Voltage: 500V AC.
5. Insertion and Extraction Force: 3N~30N.
6. Life Test: 5,000 Cycles Min.
7. Operation Temperature Range: -20°C~70°C.
8. Respervation Temperature Range: -40°C~85°C.

Part Number:

CDCJ-XX3RDT0-5H

DC Power Jack
XX: Center Pin
20:2.0mm
25:2.5mm

5H: Product Number
0: Black Color
T: Tin Plating
D: DIP Type
R: Right Angle
3: 3Pins

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-top view)

6	COVER	1	PBT 4815, UL94 V-0	Black
5	HOUSING	1	PBT 4815, UL94 V-0	Black
4	CENTER PIN	1	H59(COPPER ALLOY)	MB:Cu Ni Plating
3	CURVE PIECE	1	C2680 T=0.4	MB:Cu Sn Plating
2	SPRING	1	C5191 T=0.3	MB:Cu Sn Plating
1	FLAT PIECE	1	C2680 T=0.4	MB:Cu Sn Plating
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

A	06/07/13	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:			
DECIMALS	ANGLES		
.X ± .38	± 3°		
.XX ± .25			
.XXX ± .20			
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
		DWG. NO. CDCJ-XX3-05H	REV. A



DC Power Jack, Right Angle, DIP Type
PBT Housing, Tin Plating