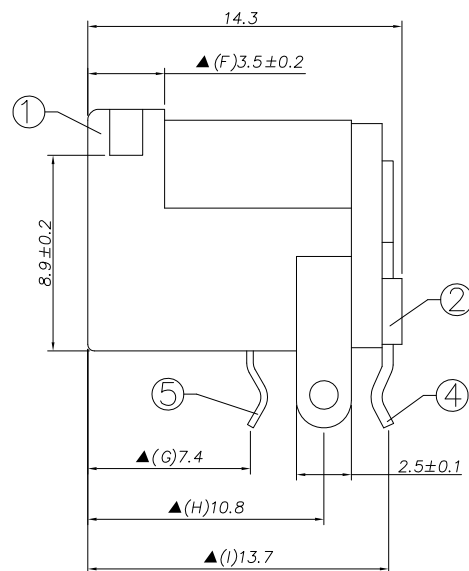
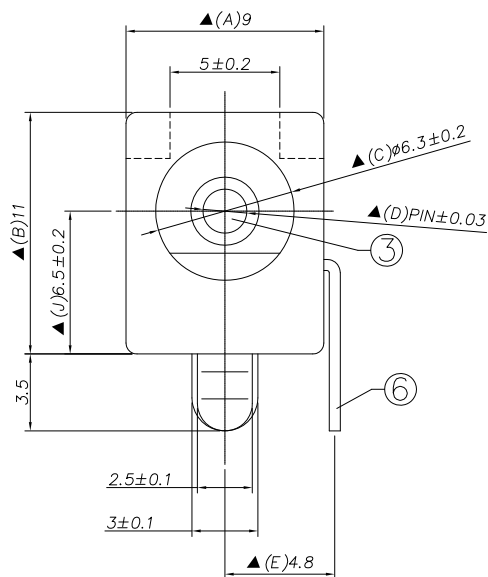


Specification:


1. Rating: DC 20V 2A.
2. Contact Resistance: 0.03Ω Max.
After Life Test: 0.05Ω Max.
3. Insulation Resistance: 100MΩ Min. (500V DC)
After Life Test: 50MΩ Min.
4. Withstand Voltage: 500V AC.
5. Insertion and Extraction Force: 3N~30N.
6. Life Test: 5,000 Cycles Min.
7. Operation Temperature Range: -20℃~70℃.
8. Respiration Temperature Range: -40℃~85℃.

Part Number:


CDCJ-XXXRDT0-5K

DC Power Jack
XX: Center Pin
20:2.0mm
23:2.35mm
25:2.5mm

5K: Product Number
0: Black Color
T: Tin Plating
D: DIP Type
R: Right Angle
2: 2Pins
3: 3Pins

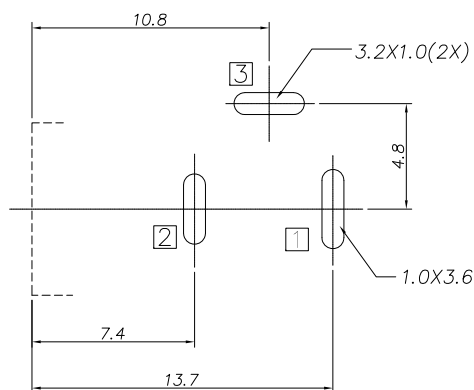

RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(BOTTOM VIEW)

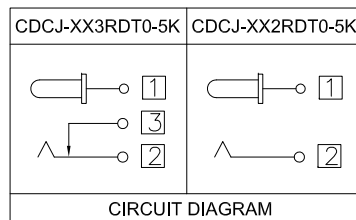

Part No.	CDCJ-20XRDT0-5K	CDCJ-23XRDT0-5K	CDCJ-25XRDT0-5K
PIN	ø2.0	ø2.35	ø2.5

					A	05/10/11	RELEASED FOR PRODUCTION										
					REV	DATE	DESCRIPTION										
6	SHUNT TERMINAL	3	1	BRASS 0.5T	Tin Plating	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM TOLERANCES ARE: DECIMALS ANGLES .X ± .38 ± 3° .XX ± .25 .XXX ± .20	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		凱聯科技股份有限公司								
5	TIP SPRING	2	1	PHOSPHOR BRONZE 0.3T	Tin Plating				Conn-Link Technology Inc.								
4	CENTER PIN TERMINAL	1	1	BRASS 0.5T	Tin Plating		APPROVALS	DATE	DESCRIPTION	DC Power Jack, Right Angle, DIP Type PBT Housing, Tin Plating, With Kink Pins							
3	CENTER PIN	1	1	BRASS	CuSn/Ninckel Plating		DRAWN	Chris			05/10/11						
2	COVER		1	PBT, UL94 V-0	Black		CHECKED	Cindy			05/10/11						
1	HOUSING		1	PBT, UL94 V-0	Black	APPV	Jason	05/10/11									
NO.	DESCRIPTION		QTY	MATERIAL	REMARK	DO NOT SCALE DRAWING		SHEET	SCALE	DWG. NO.	REV.						
	1		2					1 OF 1	NONE	CDCJ-XX3-05K	A						
					5						6			7			8