
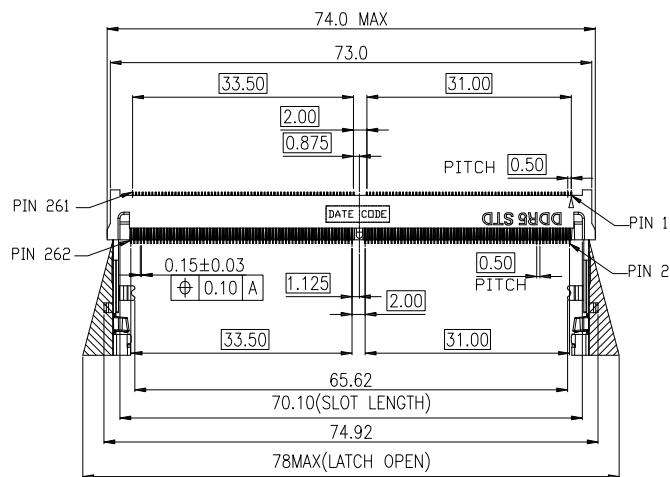
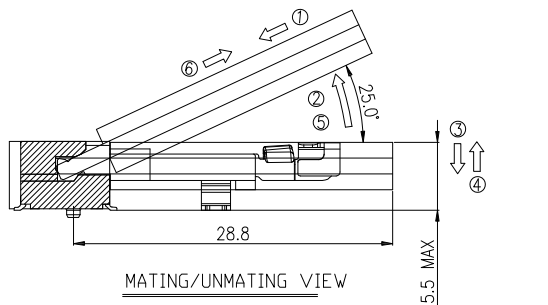
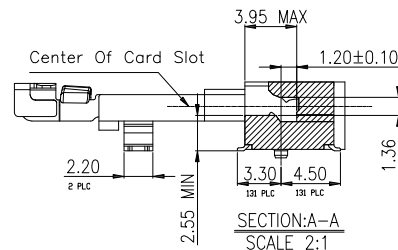


DATE CODE : YYWDLX
 YY: YEAR (09: 2009)
 WW: WEEK (25: THE 25TH WEEK)
 D: DAY (1~7: SUNDAY~SATURDAY)
 L: LINE NUMBER OF ASSEMBLY (A: LINE A)
 X: MANUFACTURE CODE

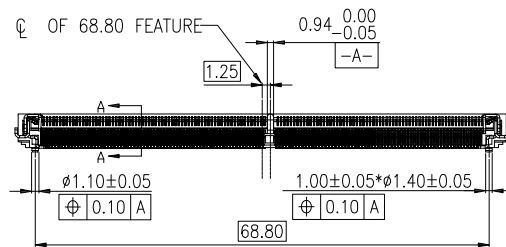

MATING: ①INSERTING(25°)→②ROTATING→③FIXED
 UNMATING:④UNFIXED→⑤ROTATING→⑥WITHDRAWING

NOTES:

1. Material:

Housing: LCP, UL 94V-0 Rated.
 Color: Black.
 Contact: Phosphor Bronze.
 Plating: Gold Plating on Contact Area.
 Gold Flash Plating on Solder Tail.
 Nickel Underplating Over All.
 Metal Latch: Stainless Steel.
 Plating: Matt Tin Plating on Solder Tail.
 Nickel Underplating Over All.

2. Specification:

Current Rating: 0.5A per Pin.
 Voltage Rating: 25V AC.
 Contact Resistance: 60mΩ Max.
 Insulation Resistance: 1MΩ Min.
 Dielectric Withstanding: 250V AC for 1Minute.
 Operating Temperature: -55°C to +85°C.
 Durability: 25Cycles Min.

Part Number:

CSD5-262RSG0-S5

SO-DDR5 Series
 262: 262Pins
 R: Right Angle
 S: SMT Type






5: H=5.2mm Height
 S: Standard Type
 0: Black Color
 G: Gold Flash

A	08/01/22	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS	ANGLES	APPROVALS	DATE
.X ± .38	± 3°	DRAWN Chris	08/01/22
.XX ± .25		CHECKED Cindy	08/01/22
.XXX ± .20		APPV Jason	08/01/22
DO NOT SCALE DRAWING		SHEET 1 OF 3	SCALE NONE
		DWG. NO.	REV.
		CSD5-262-0S5	A




凱聯科技股份有限公司
 Conn-Link Technology Inc.

DESCRIPTION SO-DIMM DDR5, 262Pins, 1.1V, Right Angle
 SMT, Standard Type, H=5.2mm Height, Black Color

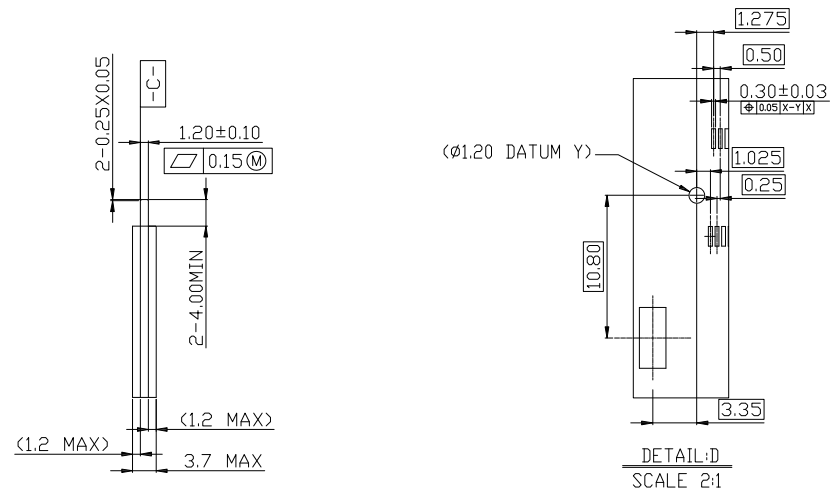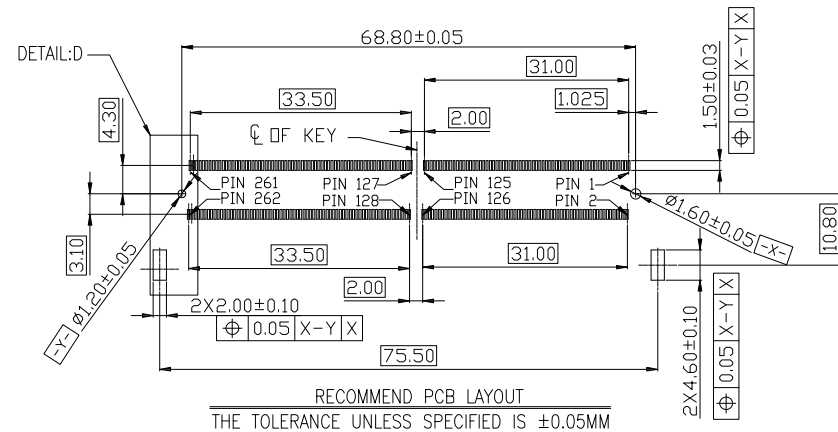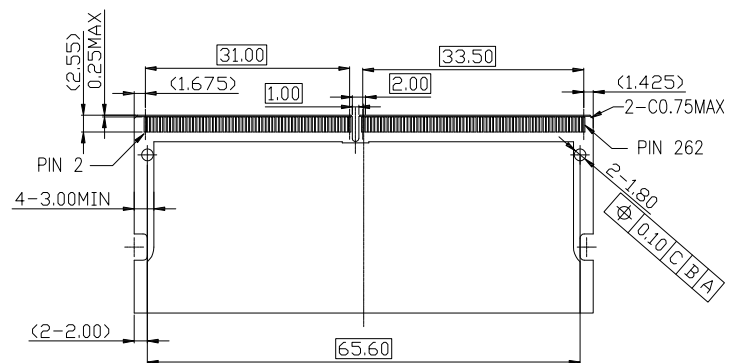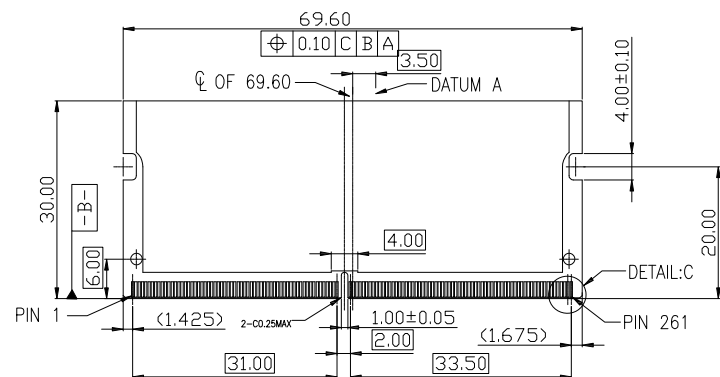

A	08/01/22	RELEASED FOR PRODUCTION				
REV	DATE	DESCRIPTION				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		 凱聯科技股份有限公司 Conn-Link Technology Inc.		
DECIMALS ANGLES		APPROVALS				
.X ± .38 ± 3°		DATE				
.XX ± .25		DRAWN Chris 08/01/22				
.XXX ± .20		CHECKED Cindy 08/01/22				
		APPV Jason 08/01/22		DESCRIPTION		
				SO-DIMM DDR5, 262Pins, 1.1V, Right Angle SMT, Standard Type, H=5.2mm Height, Black Color		
DO NOT SCALE DRAWING		SHEET 2 OF 3		SCALE NONE	DWG. NO. CSD5-262-0S5	REV. A



The diagram illustrates the process of packaging a reel of magnetic tape. It shows a reel of tape with a label and a 'REEL TOTAL LAYERS' indicator. The reel is placed into a container made of fold board, air cap, and paperboard. The container is then sealed and placed into a carton.

A	08/01/22	RELEASED FOR PRODUCTION				
REV	DATE	DESCRIPTION				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE: DECIMALS ANGLES .X ± .38 ± 3° .XX ± .25 .XXX ± .20		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		 凱聯科技股份有限公司 Conn-Link Technology Inc.	DESCRIPTION SO-DIMM DDR5, 262Pins, 1.1V, Right Angle SMT, Standard Type, H=5.2mm Height, Black Color	
		APPROVALS				DATE
		DRAWN	Chris			08/01/22
		CHECKED	Cindy			08/01/22
		APPV	Jason			08/01/22
DO NOT SCALE DRAWING		SHEET 3 OF 3	SCALE NONE	DWG. NO. CSD5-262-0S5	REV. A	