
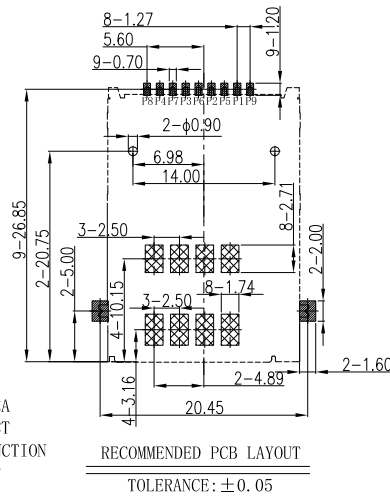
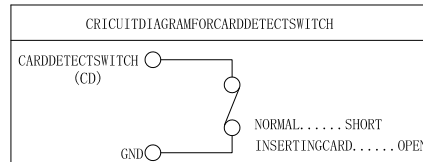
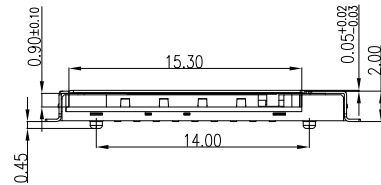

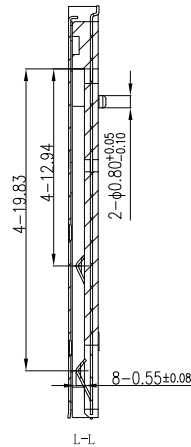


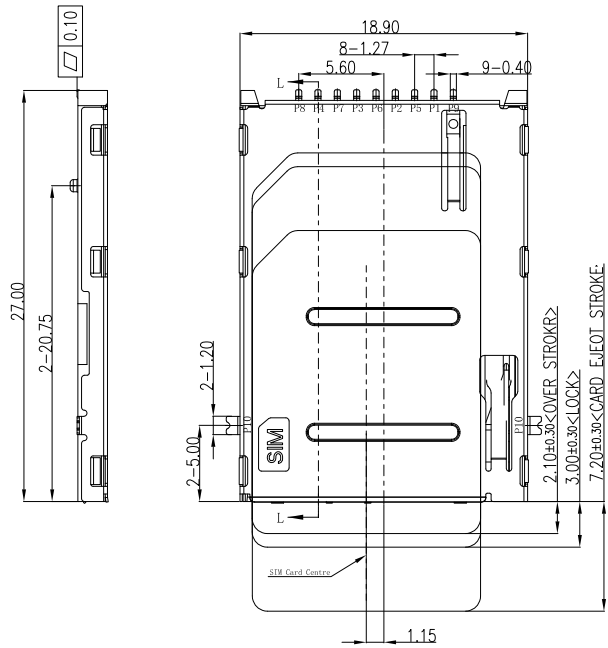

PIN/NO	ASSIGNMENT
P1	VCC
P2	RST
P3	CLK
P4	Reserved
P5	GND
P6	VPP
P7	I/O
P8	Reserved
P9	Detect Switch
P10	GND

1. TOUCH AREA OF CONTACT
TIPS NO ELECTRICAL FUNCTION
2. NO FIRST PCB LAYOUT
CIRCUITS IN THE AREA

NOTES:

1. Material:

Housing: LCP+30%G.F., UL 94V-0 Rated.
Color: Black.
Slide: LCP+30%G.F., UL 94V-0 Rated.
Color: Black.
Contact: Phosphor Bronze.
Plating: Gold Plating over Nickel on Contact Area.
Tin Plating over Nickel on Solder Area.
Shell: Stainless Steel, SUS304.
Plating: Gold Flash Plating on Solder Area.
Nickel Underplating over All.
Spring: Piano Wire, SWP-B.
Crank-Axle: Stainless Steel, SUS304.

2. Mechanical:

Insertion Force: 9.8N Max.
Withdrawal Force: 4N.
Contact Retention Force: 2.5N Min.
Durability: 10,000 Cycles Min.

3. Electrical Specification:

Current Rating: 0.5 Ampere Max per Contact.
Voltage Rating: 50V AC/DC.
Contact Resistance: 50mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 500 VAC for One Minute.

4. Environmental:

Operating Temperature: -40°C to +85°C.

Part Number:

CSIM-P08VSG0-AB3


SIM Card Series
H: Hinge Type
08: 8 Pins
V: Vertical Type
S: SMD Type
3: Tape & Reel Package
Product Number:
AB: H=2.00mm, With Posts
0: Black Color
G: Gold Flash

A	11/23/18	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS ANGLES .X ± .38 .XX ± .25 .XXX ± .20 ± 3°		APPROVALS DRAWN Chris 11/23/18 CHECKED Cindy 11/23/18 APPV Jason 11/23/18	DATE
DO NOT SCALE DRAWING		SHEET 1 OF 2	SCALE NONE
		DWG. NO. CSIM-P08-AB3	REV. A





凱聯科技股份有限公司
Conn-Link Technology Inc.

DESCRIPTION SIM Card Connector, 8P, Push-Push Type,
H=2.00mm, With Switch, With Posts, LCP, Black Color

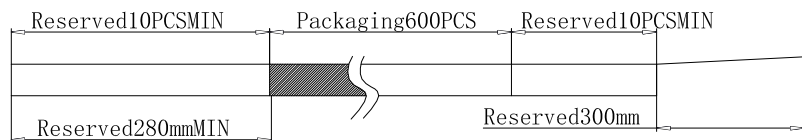

NOTES:

1. PACKING STYLE: 600 PCS/REEL
3,600 PCS/OUTER CARTON
2. MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC
3. PEEL STRENGTH OF COVER TAPE: 20~80g(PEEL SPEED 300mm/MINUTE)
4. CARTON SIZE: 350x350x340mm
5. G/W: Kg , N/W: Kg

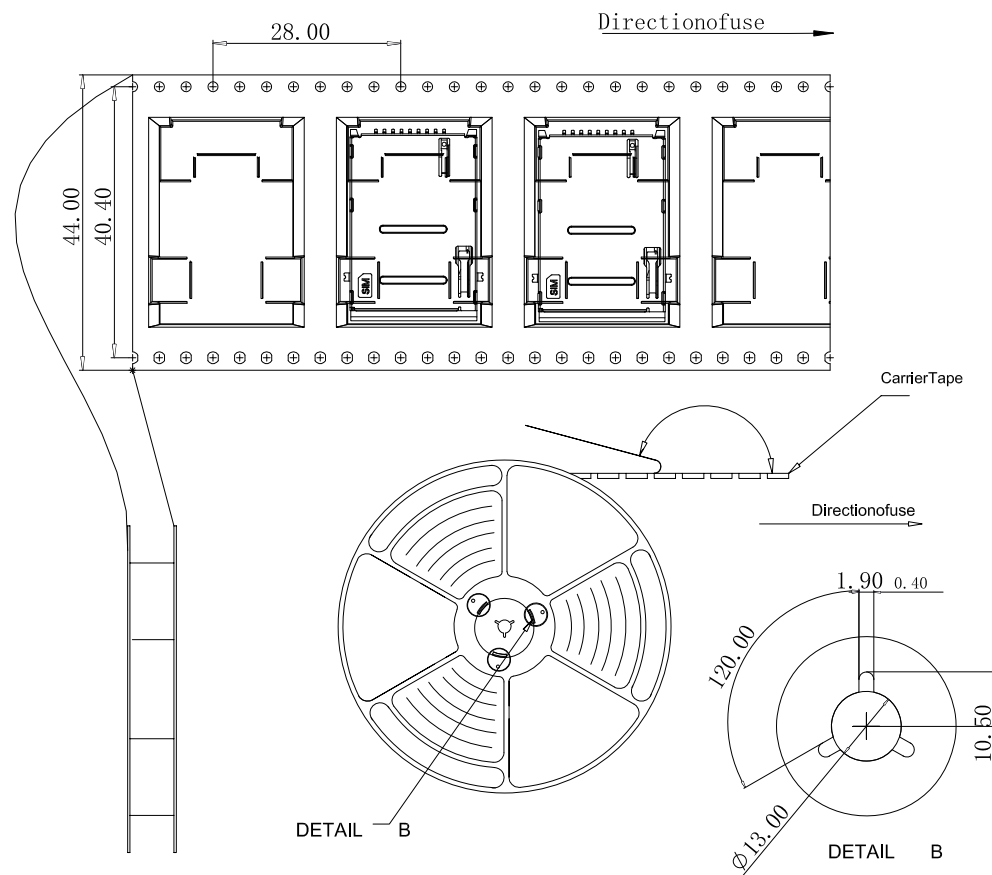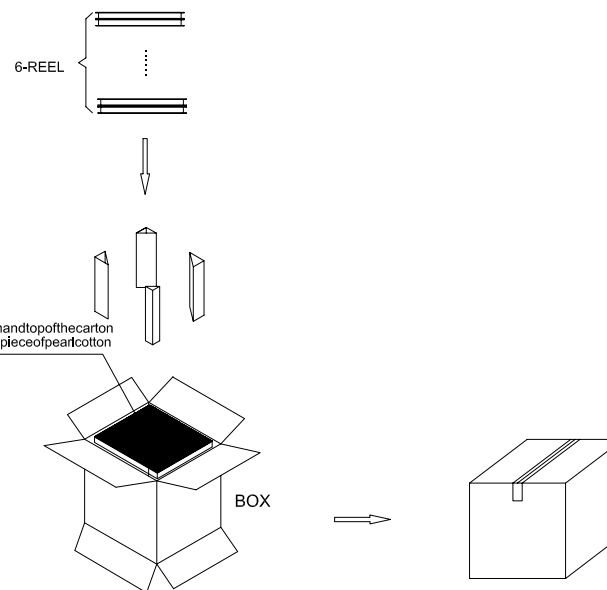

A	11/23/18	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		 凱聯科技股份有限公司 Conn-Link Technology Inc.	
DECIMALS	ANGLES		
.X ± .38	± 3°		
.XX ± .25			
.XXX ± .20			
DO NOT SCALE DRAWING		DESCRIPTION	SIM Card Connector, 8P, Push-Push Type, H=2.00mm, With Switch, With Posts, LCP, Black Color
		SCALE	NONE
		DWG. NO.	CSIM-P08-AB3-PK
		SHEET	2 OF 2
		REV.	A