

**NOTES:**

**1. Material:**

Housing: PBT, UL94 V-0 Rated.

Color: Black.

Contact: Brass, T=0.25mm.

Plating: Gold Plating over Nickel on Contact Area.

Tin Plating over Nickel on Solder Tail.

Shield: SPCC, T=0.30mm.

Plating: Nickel Plating.

**2. Electrical Specification:**

Contact Resistance: 30MΩ Max.

Insulation Resistance: 1000MΩ Min.


Dielectric Voltage: 500VAC 1 sec level.


**3: Environmental:**

Operating Temperature: -55°C to +85°C.

**Part Number:**

**CU2A-R04RDG0-11**

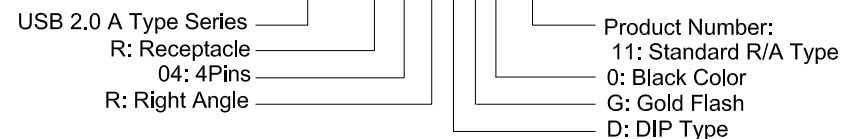

A	07/20/10	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		 <b>凱聯科技股份有限公司</b> <b>Conn-Link Technology Inc.</b>	
DECIMALS	ANGLES		
.X ± .38	± 3°		
.XX ± .25			
.XXX ± .20		DESCRIPTION	USB A Type, Receptacle, 4Pins, Right Angle DIP Type, Black Color, Gold Flash
DO NOT SCALE DRAWING	SHEET 1 OF 1	SCALE NONE	DWG. NO. CU2A-R04-011