


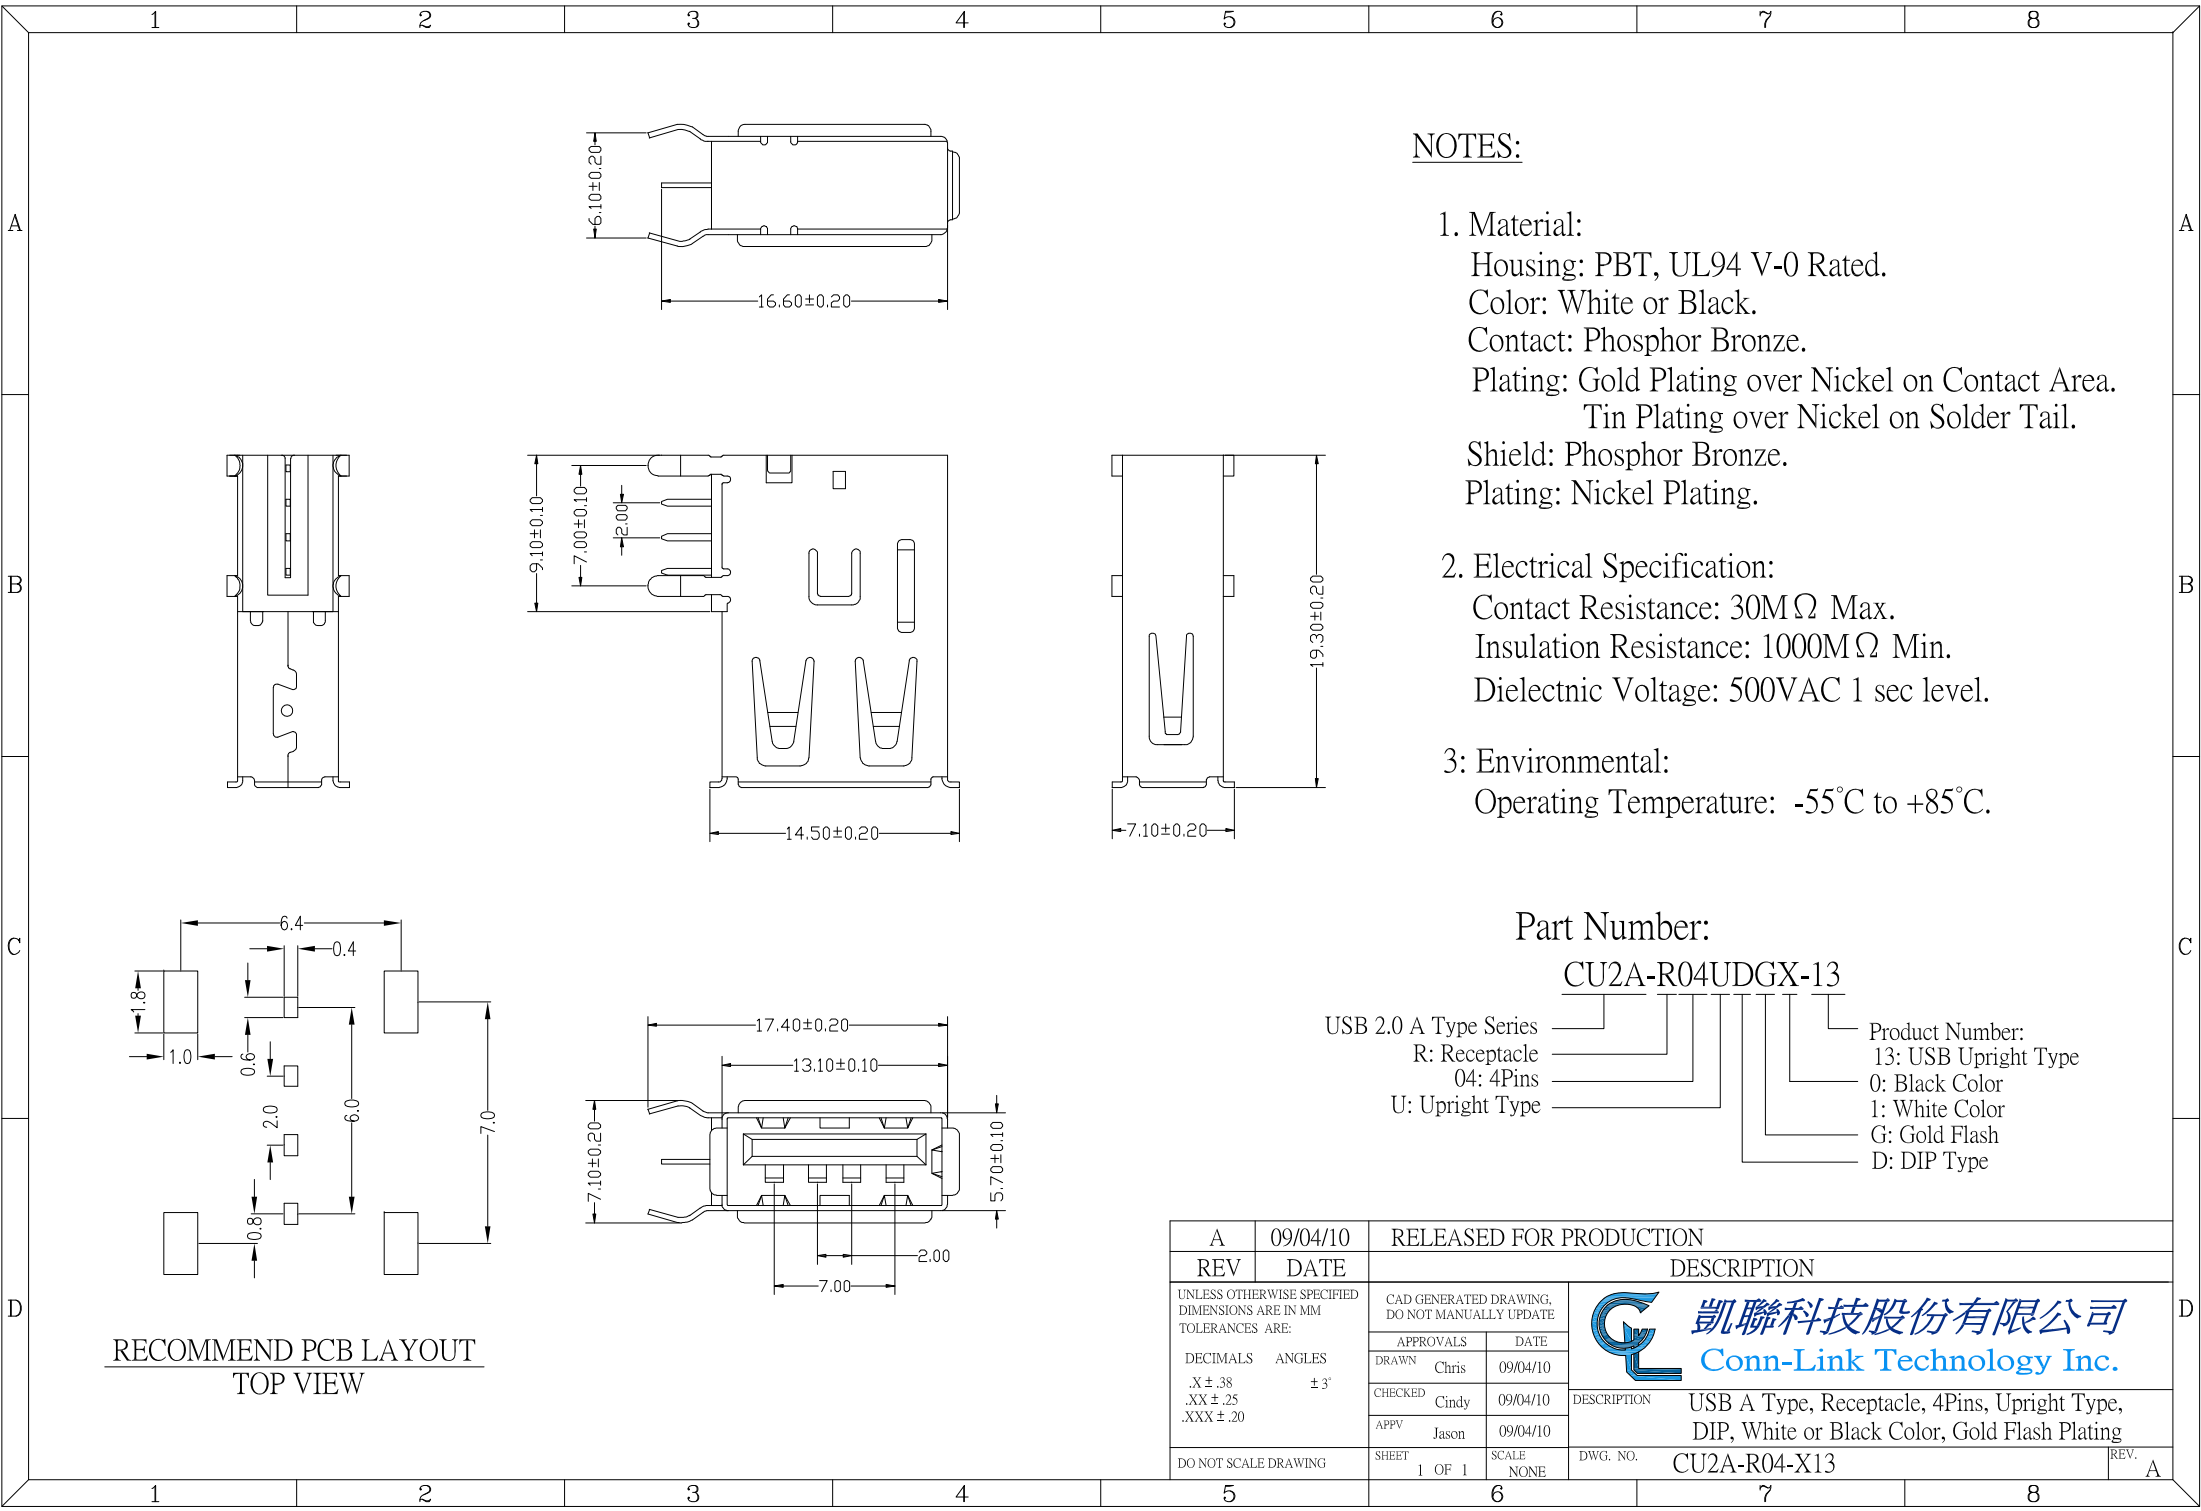

NOTES:

1. Material:
- Housing: PBT, UL94 V-0 Rated.
 - Color: White or Black.
 - Contact: Phosphor Bronze.
 - Plating: Gold Plating over Nickel on Contact Area.
 - Tin Plating over Nickel on Solder Tail.
 - Shield: Phosphor Bronze.
 - Plating: Nickel Plating.
2. Electrical Specification:
- Contact Resistance: $30M\Omega$ Max.
 - Insulation Resistance: $1000M\Omega$ Min.
 - Dielectnic Voltage: 500VAC 1 sec level.
- 3: Environmental:
- Operating Temperature: $-55^{\circ}C$ to $+85^{\circ}C$.

Part Number:

CU2A-R04UDGX-13

USB 2.0 A Type Series
R: Receptacle
04: 4Pins
U: Upright Type

Product Number:
13: USB Upright Type
0: Black Color
1: White Color
G: Gold Flash
D: DIP Type

A		09/04/10		RELEASED FOR PRODUCTION						
REV		DATE		DESCRIPTION						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE: DECIMALS ANGLES .X $\pm .38$ $\pm 3^{\circ}$.XX $\pm .25$.XXX $\pm .20$				CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE			凱聯科技股份有限公司 Conn-Link Technology Inc.			
				APPROVALS DATE						
				DRAWN Chris	09/04/10					
				CHECKED Cindy	09/04/10					
				APPV Jason	09/04/10	DESCRIPTION	USB A Type, Receptacle, 4Pins, Upright Type, DIP, White or Black Color, Gold Flash Plating			
DO NOT SCALE DRAWING				SHEET 1 OF 1	SCALE NONE				DWG. NO.	CU2A-R04-X13
									REV.	A



凱聯科技股份有限公司
Conn-Link Technology Inc.

DESCRIPTION USB A Type, Receptacle, 4Pins, Upright Type,
DIP, White or Black Color, Gold Flash Plating