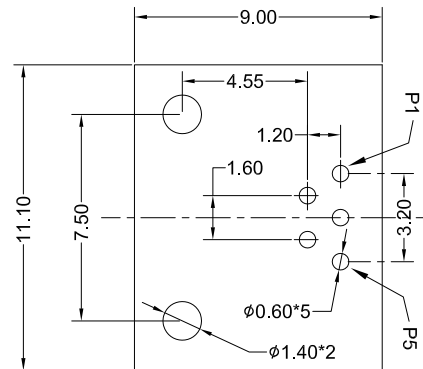
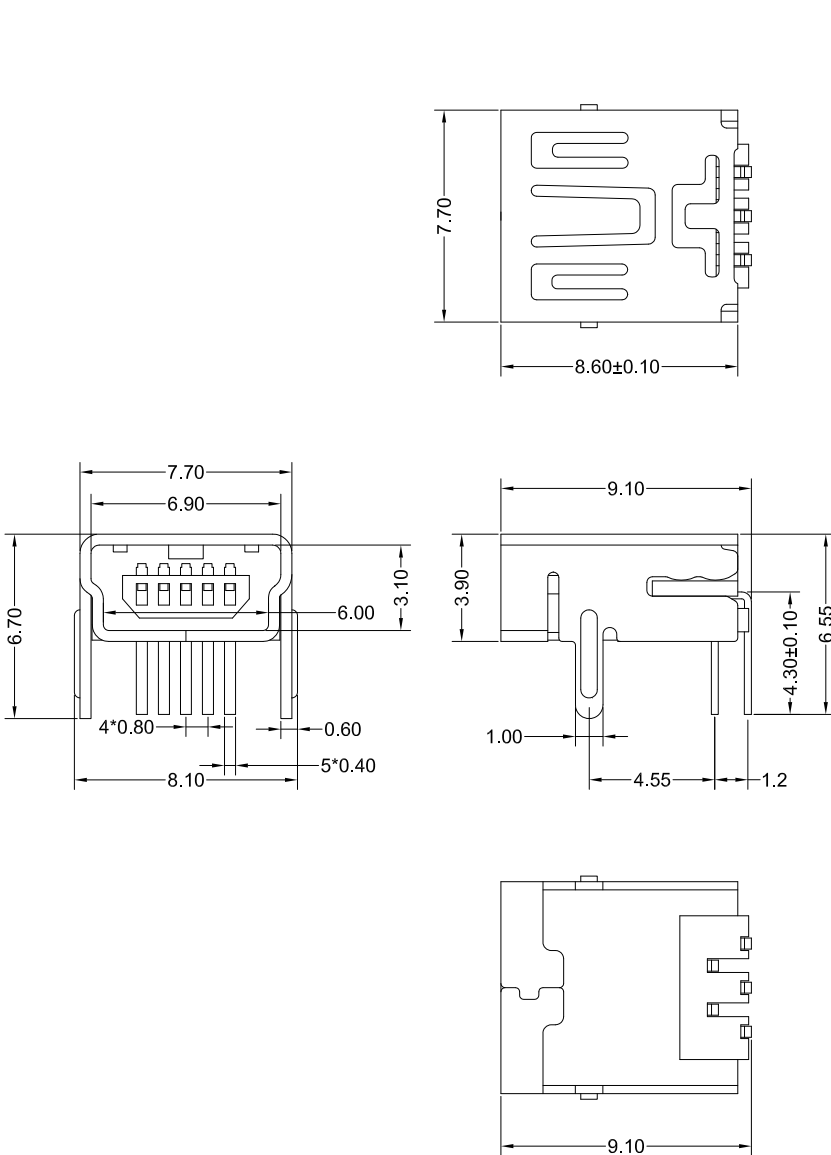


NOTES:

1. Material:

Housing: PA9T Glass Fibre UL94 V-0.

Color: Black.

Contact: Phosphor Bronze T=0.25mm±0.02mm.

Plating: Gold Plating over Nickel(60u") on Contact Area,
Tin(80u"~100u") Plating over Nickel(60u") on Solder Tail.

Shield: Brass T=0.40mm±0.02mm.

Plating: Nickel(100u"~120u") Plating.

2. Mechanical:

Insertion Force: 35N Max.

Withdrawal Force: 10N Min Initial, 8-20N after 1000Cycles.

Durability: 100 cycles

3. Electrical Specification:

Current Rating: 1.0Ampere at 30VDC.

Contact Resistance: 30mΩ Max Initial, 40mΩ after 1000Cycles.

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding Voltage: 100 VAC per Sec.

4. Environmental:

Operating Temperature: -55°C to +105°C

Part Number:

CU2N-R05RDG0-11

USB2.0 Mini Type

R: Receptacle

05: 5Pins

R: Right Angle

Product Number

11: R/A Mini B Type

0: Black

G: Gold Flash

D: DIP Type

A	03/11/07	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		 凱聯科技股份有限公司 Conn-Link Technology Inc.	
DECIMALS	ANGLES		
.X ± .38	± 3°		
.XX ± .25			
.XXX ± .20			
DO NOT SCALE DRAWING		Mini USB B Type, 5Pins, R/A, DIP, G/F Plating	
SHEET	1 OF 1	SCALE	NONE
DWG. NO.	CU2N-R05-D11	REV.	A