
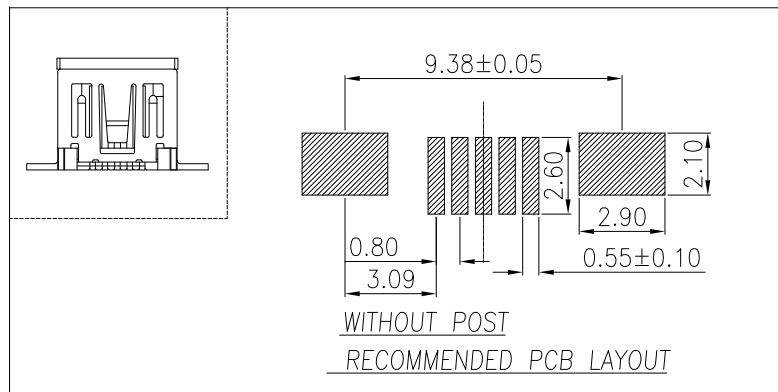


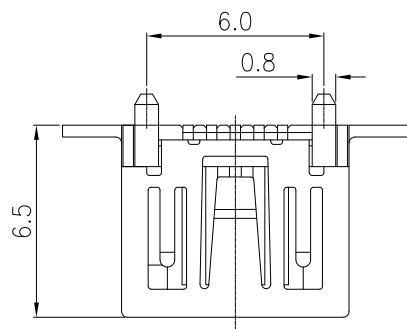

NOTES:

1. Material:

Housing: LCP with G.F. UL94V-0
Color: Black.
Contact: Phosphor Bronze.
Plating: Gold Plating over Nickel on Contact Area,
Tin Plating on Solder Tail.
Shield: Brass.
Plating: Nickel Plating.

2. Mechanical:

Insertion Force: 3.57Kgf Max.
Withdrawal Force: 0.71Kgf Min.

3. Electrical Specification:

Current Rating: 1.5Ampere at 30VDC.
Contact Resistance: 50mΩ Max.
Insulation Resistance: 100MΩ Min.
Dielectric Withstanding Voltage: 100 VAC for 1Min.

4. Environmental:





Operating Temperature: -30°C to +80°C

Part Number:

CU2N-R05VS20-TC

USB2.0 Mini Type
R: Receptacle
05: 5Pins
V: Vertical Type

Product Number
TC: Vertical Mini B Type
H=6.5mm Height, Without Post
0: Black
2: 10u" Plating
S: SMT Type

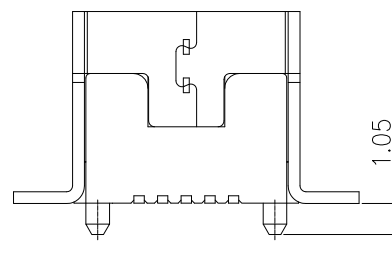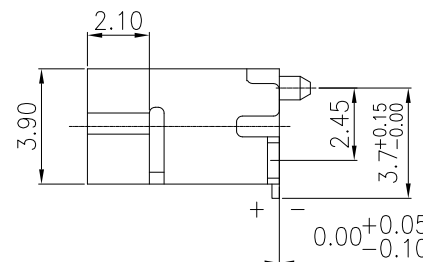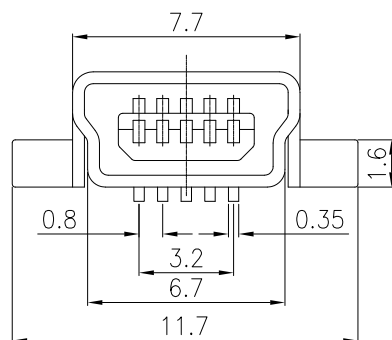

A	09/27/06	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS	ANGLES	APPROVALS	DATE
.X ± .38	± 3°	DRAWN Chris	09/27/06
.XX ± .25		CHECKED Cindy	09/27/06
.XXX ± .20		APPV Jason	09/27/06
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
		DWG. NO.	CU2N-R05-T1C
		REV.	A



凱聯科技股份有限公司
Conn-Link Technology Inc.

DESCRIPTION Mini USB B Type, 5Pins, Vertical, SMT Type
H=6.50mm Height, Without Post, G/F Plating, Black