


**NOTES:**

- Material:**  
Housing: Nylon 66, UL 94V-0 Rated.  
Color: Black.  
Contact: Brass.  
Plating: Tin Plating over Nickel.
- Electrical Specification:**  
Current Rating: 5 Ampere AC/DC per Contact.  
Contact Resistance: 20mΩ Max.  
Insulation Resistance: 1,000MΩ Min.  
Dielectric Withstanding Voltage: 1,500V AC per Minute.
- Environmental:**  
Operating Temperature: -40°C to +105°C.

Poles	Part Number	Dimensions (mm)	
		A	B
2	CW30-M02RDT0-37	---	6.65
4	CW30-M04RDT0-37	3.00	9.65
6	CW30-M06RDT0-37	6.00	12.65
8	CW30-M08RDT0-37	9.00	15.65
10	CW30-M10RDT0-37	12.00	18.65
12	CW30-M12RDT0-37	15.00	21.65
14	CW30-M14RDT0-37	18.00	24.65
16	CW30-M16RDT0-37	21.00	27.65
18	CW30-M18RDT0-37	24.00	30.65
20	CW30-M20RDT0-37	27.00	33.65
22	CW30-M22RDT0-37	30.00	36.65
24	CW30-M24RDT0-37	33.00	39.65

**Part Number:**

**CW30-MXXRDT0-37**

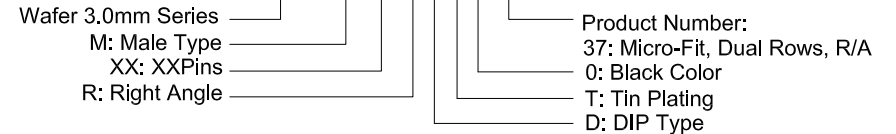

A	01/20/14	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS	ANGLES	APPROVALS	DATE
.X ± .38	± 3°	DRAWN Chris	01/20/14
.XX ± .25		CHECKED Cindy	01/20/14
.XXX ± .20		APPV Jason	01/20/14
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
		DWG. NO. CW30-MXX-327	REV. A



Micro-Fit, Double Rows, 3.0mm Wire to Board Power Connector, Right Angle, DIP, Black Color