


**RoHS**

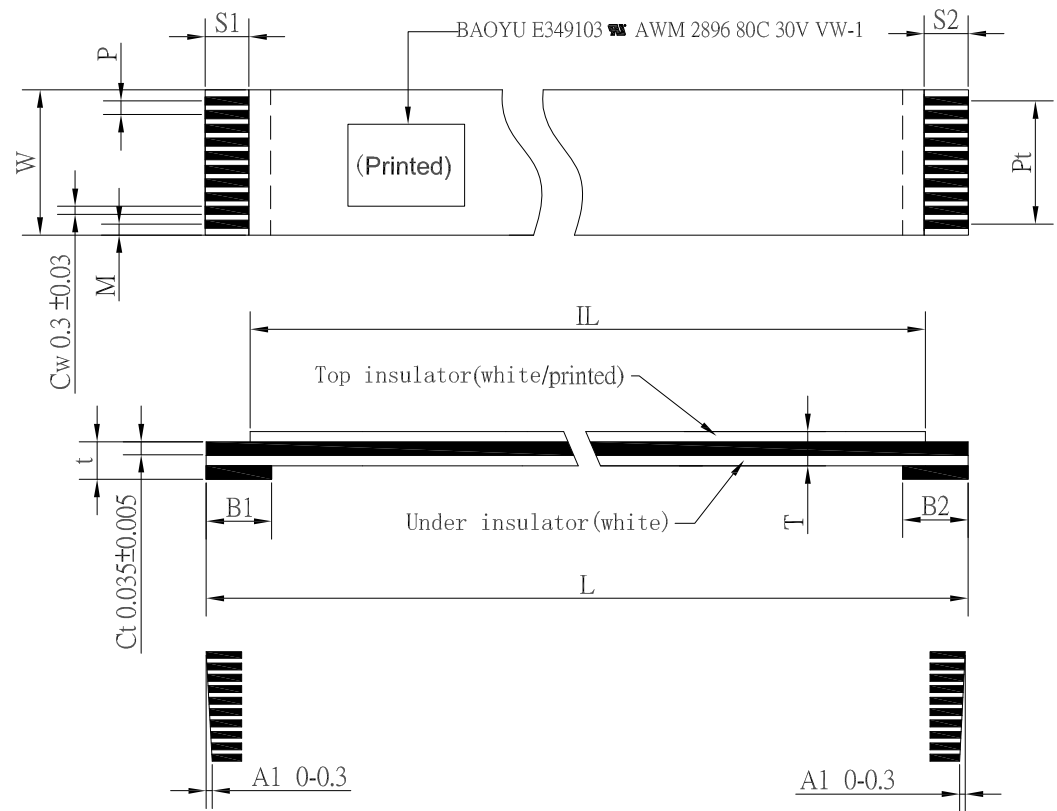

Unit (單位): mm

N	Number of Conductors (銅線數)	30
P	Pitch (銅線間距)	0.5±0.05
SP	Total Pitch (總間距)	14.5±0.07
W	Total Width (總寬度)	15.5±0.07
IL	Insulation Length (產品內長)	34±2
TL	Total Length (產品總長)	40±2
M	Margin Width (邊距)	0.5±0.07
T	Terminal Thickness (端子厚度)	0.3±0.05
Ct	Conductor Thickness (銅線厚度)	0.035±0.005
Cw	Conductor Width (銅線寬度)	0.30±0.03
S1	Strip Length (裸銅長度)	3±1
S2	Strip Length (裸銅長度)	3±1
B1	Supporting Tape Length (補強板長度)	5±2
B2	Supporting Tape Length (補強板長度)	5±2
Tt	Cable Thickness (線身厚度)	0.15±0.04
4	Connecting Stiffener: 0.225T, Blue	
3	Top Insulation: White, Printed	
2	Under Insulation: White, No Marking	
1	Conductor, Tin Plating: 0.3mm*0.035mm	

Part Number:  
LFFC-30B30B103-0040

Available UL Standard:  
2896-80°C,30V

A	03/31/15	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:			
DECIMALS	ANGLES	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
.X ± .38	± 3°	APPROVALS	DATE
.XX ± .25		DRAWN Chris	03/31/15
.XXX ± .20		CHECKED Cindy	03/31/15
DO NOT SCALE DRAWING		APPV Jason	03/31/15
		SHEET 1 OF 1	SCALE NONE
		DWG NO.	LFFC-30B30B103-0040
		REV.	A



**凱聯科技股份有限公司**  
Conn-Link Technology Inc.

DESCRIPTION Flexible Flat Cable, 30P, 0.5mm pitch, 3/3/5/5  
Conductor Width 0.3\*0.035mm, L=40mm