



**RoHS**

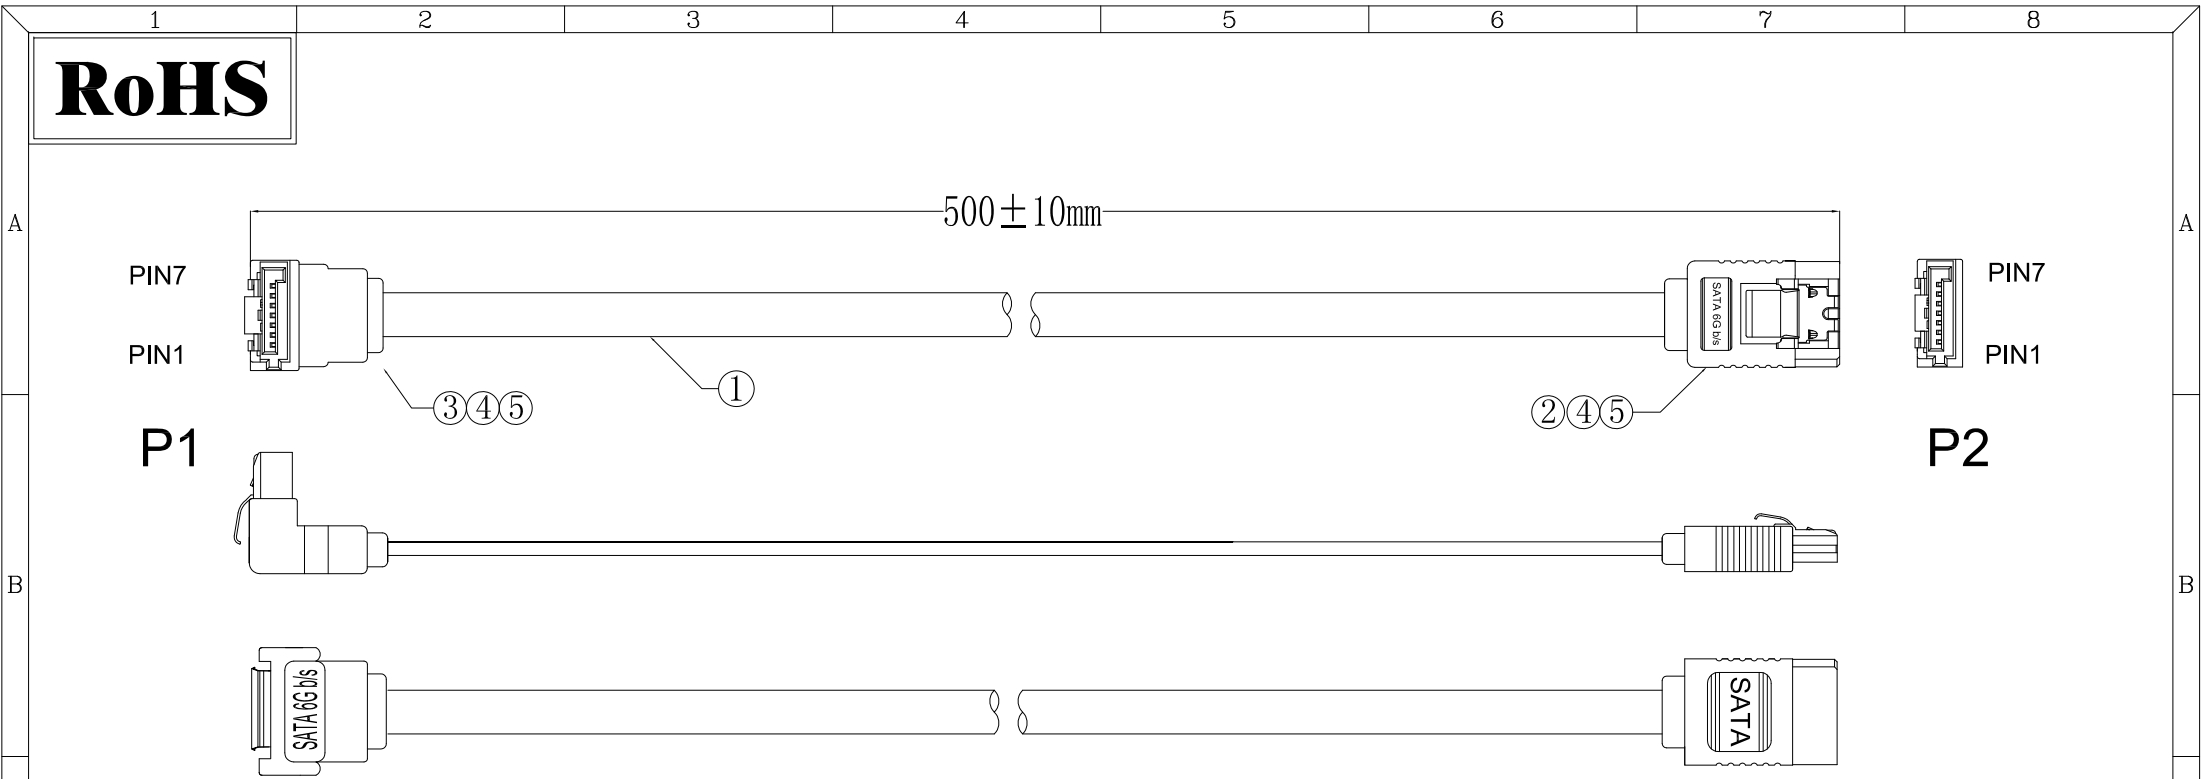

**Electronic Test:**

1. 100% Test, (Open/Short, Miss Wire)
2. Contact Resistance: 5 Ohm Max.
3. Insulation Resistance: 20M Ohm Min.
4. Hi-Pot: 300V DC/10ms.

5	In Jacket	Clear LD-PE	3.5g
4	Out Jacket	PVC 45P Color Black	4.5g
3	Connector	SATA 7P/F Pin:G/F, INS Black, PBT Latching:Ni, 90D	1pcs
2	Connector	SATA 7P/F Pin:G/F, INS Black, PBT Latching:Ni, 180D	1pcs
1	Cable	UL21149 26AWG*4C+4D(CS)+AL/MYLAR+PVC JACKET BLACK $\phi$ 2.2*7.8MM L=490±5MM	1pcs
NO.	P/N	SPECIFICATION	QTY

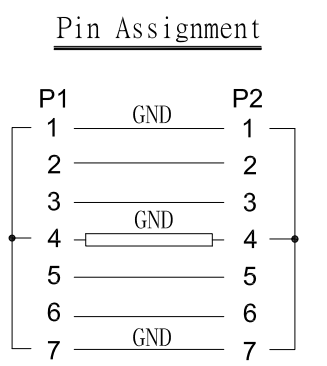

**Part Number:**

**LSAT-07F07F305-0500**

A	05/28/12	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS	ANGLES	APPROVALS	DATE
.X ± .38	± 3°	DRAWN Chris	05/28/12
.XX ± .25		CHECKED Cindy	05/28/12
.XXX ± .20		APPV Jason	05/28/12
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
		DWG NO.	LSAT-07F07F305-0500
		REV.	A



**SATA 3.0 Cable, 7P/F90° to 7P/F180° With Latching, Length =500mm**