


**RoHS**

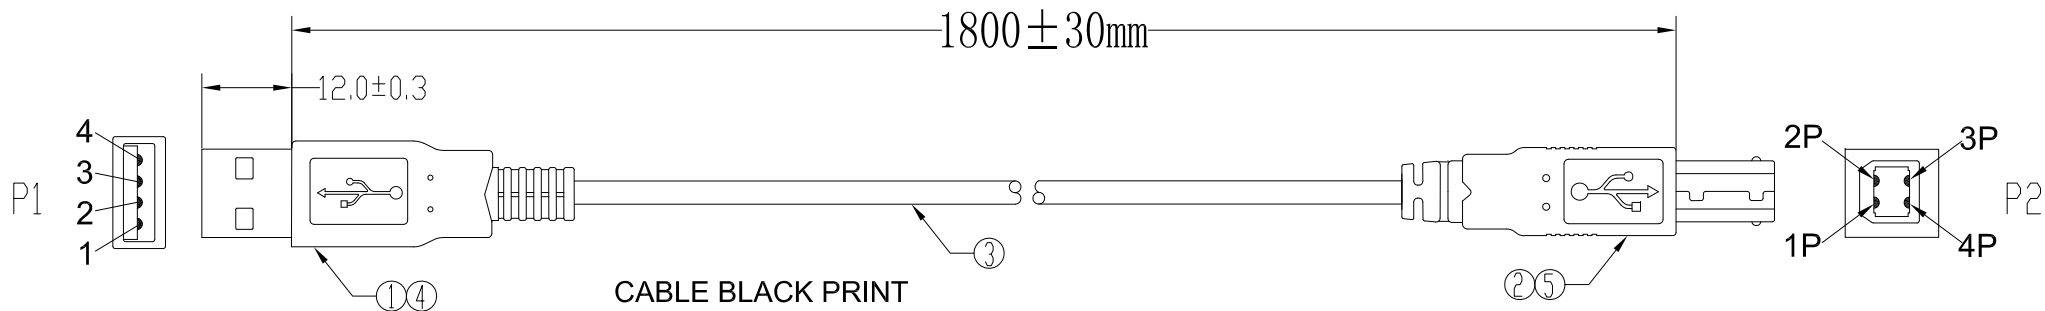


**CABLE BLACK PRINT**  
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+24AWG/2C  
 E189529 AWM STYLE 2725 80°C 30V VW-1 VEGA TECH

**Electronic Test:**

- 1.100% short,open,miswire test.
- 2.Conduct resistance:2 Ohm(max)
- 3.Insulation resistance:10Mohm(min)
- 4.dielectric test:DC 300V

5	Out Jacket	WHITE PVC-40P (MOULD NO:WM-65)	6 g
4	Out Jacket	WHITE PVC-40P (MOULD NO:WM-40)	6 g
3	Cable	WHITE USB2.0 UL2725 28#/1P+26#/2C+ AEB OD:4.7mm L=1800±15mm	1 pcs
2	Connector	USB2.0 B MALE SHELL:NICKEL PIN G/F CRIMP TYPE INSULATOR COLOR:WHITE	1 set
1	Connector	USB2.0 A MALE SHELL:NICKEL PIN G/F CRIMP TYPE INSULATOR COLOR:WHITE	1 set
NO.	P/N	DESCRIPTION	QTY

Pin Assignment



**Part Number:**

**LUSB-04M04M213-1800**

A	12/20/11	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS	ANGLES	APPROVALS	DATE
.X ± .38	± 3°	DRAWN Chris	12/20/11
.XX ± .25		CHECKED Cindy	12/20/11
.XXX ± .20		APPV Jason	12/20/11
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
		DWG NO.	LUSB-04M04M213-1800
		REV.	A



**DESCRIPTION** USB2.0 Cable, AM to BM, 1.8M, White Color 28AWG/1P+26AWG/2C

A  
B  
C  
D

A  
B  
C  
D

1 2 3 4 5 6 7 8