


RoHS

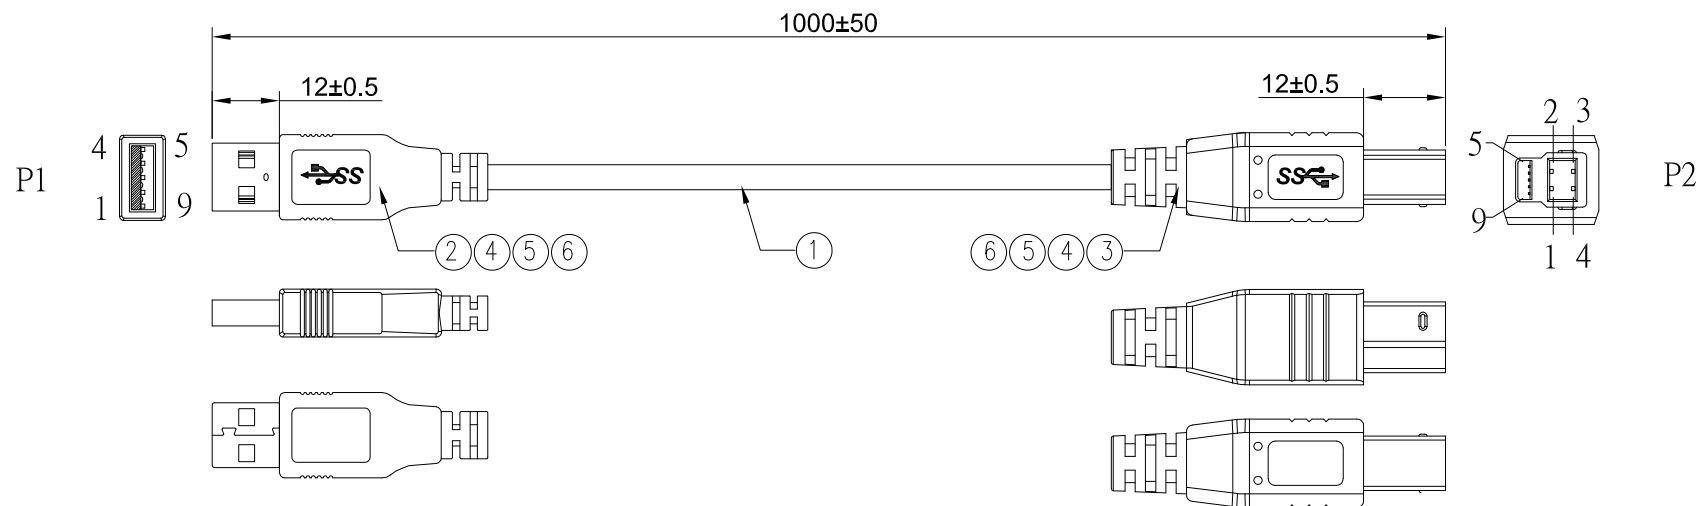


Test Request:

1. 100% Electronics Test of OS Test, Contact Test.
2. Insulation Resistance: 10M Ω /Min.
3. Contact Resistance: 5 Ω /Max.
4. Hi-Voltage Test: 300V DC

Packing:


1PCS/BAG

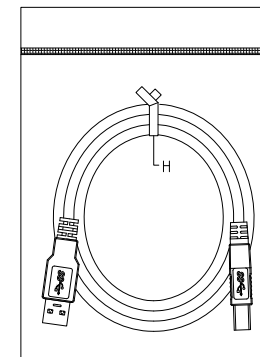

6	H.S.T	OD:0.8MM BLACK H.S.T	1 pcs
5	H.S.T	OD:1.5MM BLACK H.S.T	1 pcs
4	Molding	BLUE PVC 45P	g
3	Connector	USB3.0 9P, B Type, Male, Blue	1 pcs
2	Connector	USB3.0 9P, A Type, Male, Blue	1 pcs
1	Cable	USB3.0 28/28/28+AEB AL65%, PANTONE OD:5.4 JACKET:BLUE	1 pcs

NO.	P/N	DESCRIPTION	QTY
-----	-----	-------------	-----

Pin Assignment



Part Number:

LUSB-09M09M303-1000

A	12/18/10	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS	ANGLES	APPROVALS	DATE
.X ± .38	± 3°	DRAWN Chris	12/18/10
.XX ± .25		CHECKED Cindy	12/18/10
.XXX ± .20		APPV Jason	12/18/10
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
DWG NO. LUSB-20101218-C002		DESCRIPTION USB3.0 AM/USB3.0 BM Cable, Length=1.5M	
REV. A			



凱聯科技股份有限公司
Conn-Link Technology Inc.

DESCRIPTION USB3.0 AM/USB3.0 BM Cable, Length=1.5M

DWG NO. LUSB-20101218-C002

REV. A