


RoHS

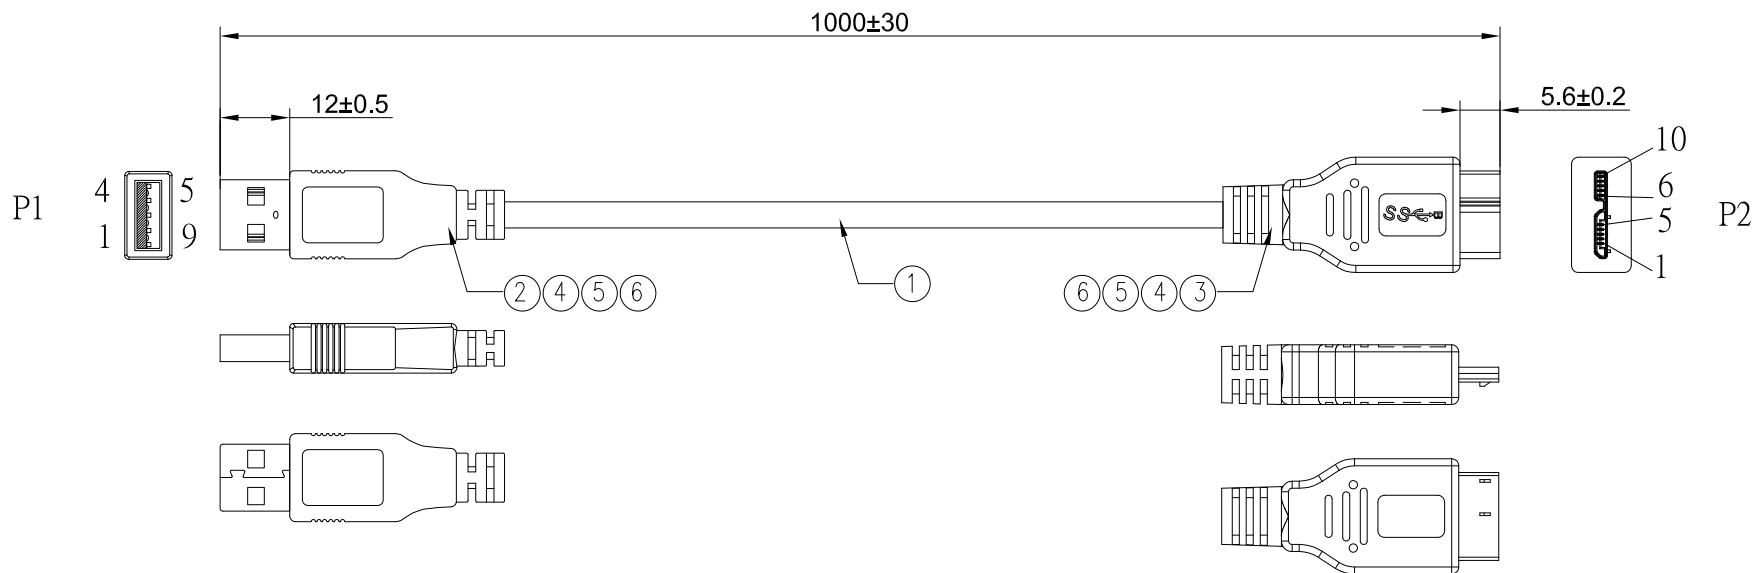


Test Request:

1. 100% Electronics Test of OS Test, Contact Test.
2. Insulation Resistance: 10M Ω /Min.
3. Contact Resistance: 5 Ω /Max.
4. Hi-Voltage Test: 300V DC

6	H.S.T	OD:0.8mm BLACK	pcs
5	H.S.T	OD:2.0mm BLACK	pcs
4	Molding	PVC BLACK 35P	g
3	Connector	USB 3.0 MICRO-B MALE 15U SOLDER, TYPE, INSULATE: BLACK	1 pcs
2	Connector	USB 3.0 A MALE 15U SOLDER TYPE, SHELL PLATING/Ni BLUE	1 pcs
1	Cable	USB 3.0(28#*1P+EAM)*2+28*1P+2C+ AB65% BLACK OD:5.4mm	1 pcs
NO.	P/N	DESCRIPTION	QTY

Pin Assignment



Part Number:

LUSB-09M09M304-1000

A		12/17/10		RELEASED FOR PRODUCTION			
REV		DATE		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE: DECIMALS ANGLES .X ± .38							