




RoHS

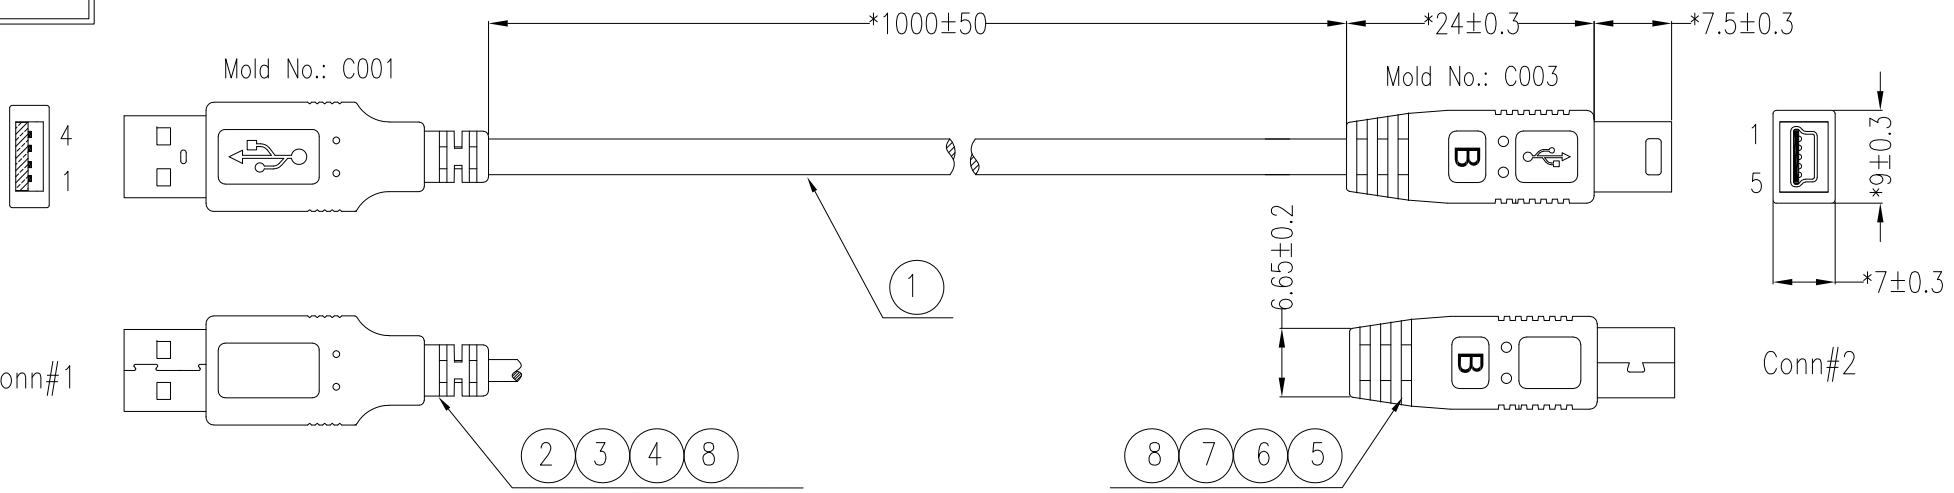


Labeled on Carton



Standard Package

Pin Assignment

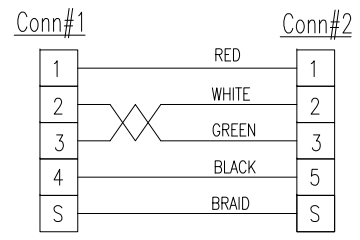

Notes:

- Electronic Test:
 - 100% Open Short & Mis-Wire Test.
 - Contact Resistance: 1Ω Max.
 - Insulation Resistance: 20MΩ Min.
 - Contact Voltage: DC300V/10milliseconds.
- Part No.: LUSB-4AM5NMR02-1000
- * Critical Dimension Must To Be QC.

*	PE BAG	PE Bag 3"×8"×0.06mm	1	PCS
10	TIE	Tie, Black Color	100	MM
9	LABEL	UL Label (Orange) Issue No. XXXXXX	XX	PCS
8	OVER MOLD	Over Mold, PVC 50P, Black Color	14	G
7	BACK SHELL	USB2.0 Mini B, Male, Back Shell, Nickel-Plating	1	PCS
6	FRONT SHELL	USB2.0 Mini B, Male, Front Shell, Nickel-Plating	1	PCS
5	CONNECTOR	USB2.0 Mini B, 5P, Male, Black Color	1	PCS
4	BACK SHELL	USB2.0 Type A, Male, Back Shell, Nickel-Plating	1	PCS
3	FRONT SHELL	USB2.0 Type A, Male, Front Shell, Nickel-Plating	1	PCS
2	CONNECTOR	USB2.0 Type A, 4P, Male, White Color	1	PCS
1	CABLE	UL2725(#28*1P+#28*2C+ADB), OD:3.5mm, PVC Jacket: Black Color	1062.0	MM
Item	Name	Specifications	QTY	UNIT

A	06/05/19	RELEASED FOR PRODUCTION	
REV	DATE	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
DECIMALS	ANGLES	APPROVALS	DATE
.X ± .38	± 3°	DRAWN Chris	06/05/19
.XX ± .25		CHECKED Cindy	06/05/19
.XXX ± .20		APPV Jason	06/05/19
DO NOT SCALE DRAWING		SHEET 1 OF 1	SCALE NONE
		DWG NO. LUSB-4AM5NMR02-1000	REV. A



DESCRIPTION USB2.0 Cable, Type A Male to Mini B Male
UL2725, OD:3.5mm, PVC Jacket, Black Color, L=1000mm