


**RoHS**

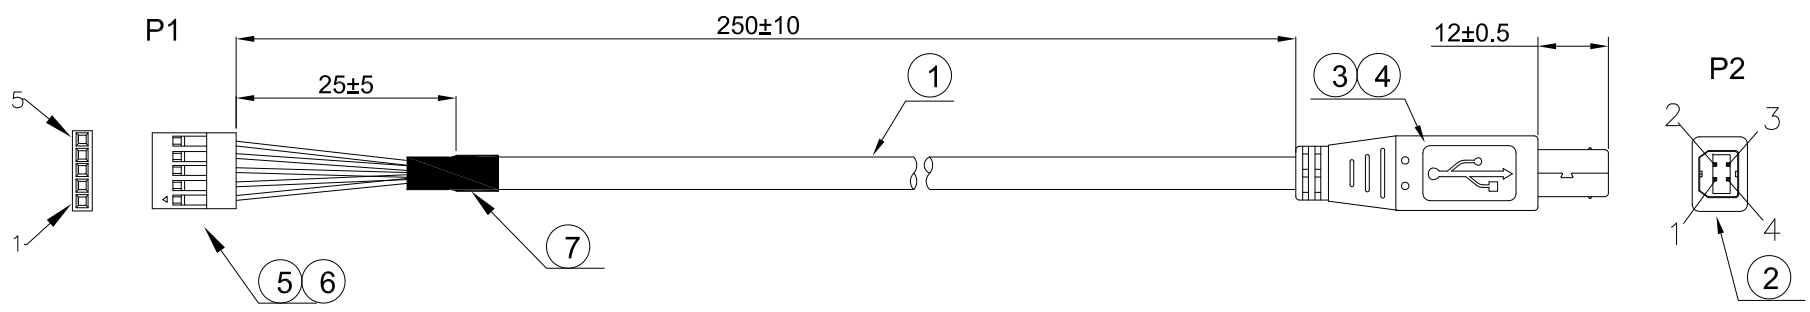



**Notes:**

- 1.ELECTRICAL TEST:
  - (1).100% Open Short and Mis-Wire Test.
  - (2).Contact Resistance: 5ΩMAX.
  - (3).Insulation Resistance: 10MΩMin
  - (4).Contact Voltage: DC300V/10MS
- 2.PART NO.  
LUSB-4BM57F000-0250

7	TUBE	Heat-Shrinkable Tube, Black, □5.0*15mm	1	PCS
6	TERMINAL	DB 2.54mm, Terminal, Tin-Plated	5	PCS
5	HOUSING	DB 2.54mm, Housing, Black, 5Y Single Row	1	PCS
4	WIRE	Soil-Wire:63/37-□.0mm	0.2	g
3	PVC	PVC-Black-50P	*	g
2	CONNECTOR	USB BM/Ni White Housing, 3 in 1	1	PCS
1	CABLE	28#<7/0.12TA>*1P+24#<11/0.15TA>*2C+AL+ D7/0.12TS+64/0.12, Al-Mg Braided Black Color-OD:4.5mm, UL2725	1	PCS
NO	PART NO.	DESCRIPTION	QTY	UNIT

**Pin Assignment**



A		05/27/15		RELEASED FOR PRODUCTION		
REV	DATE	DESCRIPTION				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE				
DECIMALS	ANGLES	APPROVALS	DATE	 <b>凱聯科技股份有限公司</b> <b>Conn-Link Technology Inc.</b>		
.X ± .38	± 3°	DRAWN	Chris			05/27/15
.XX ± .25		CHECKED	Cindy			05/27/15
.XXX ± .20		APPV	Jason			05/27/15
DO NOT SCALE DRAWING		SHEET	1 OF 1	SCALE	NONE	
		DWG NO.	LUSB-4BM57F000-0250		REV. A	